

PASTILO CCT

SLI042000CCT_PW

LED luminaire PASTILO CCT with the possibility of changing the light color (CCT), with a power of 10 W, high light efficacy 120 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. IK10 class provides impact resistance. Designed for surface mounting.

CCT

IP54


IK10



Power	10 W	Voltage	230 V
Luminous flux*	1200 lm (360°)	Colour temperature	2700/4000/6000 K
Colour of light	CCT	Beam angle	120 °
IK	10	Degree of protection (IP)	IP54

Technical data

Code	SLI042000CCT_PW
Power	10 W
Nominal current	80 mA
Voltage	230 V
Energy consumption	10 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.5
Useful luminous flux*	1200 lm (360°)
Luminous flux**	1100 lm (360°)
Lamp efficacy	120 lm/W
Colour temperature	2700/4000/6000 K
Colour of light	CCT
Beam angle	120 °
RA	80
Light source included	+
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Plastic
IK	10
Degree of protection (IP)	IP54
Colour	White
Dimension (AxBxC)	205x105x47 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC
Other	Light color change function 2700K/4000K/6000K ,

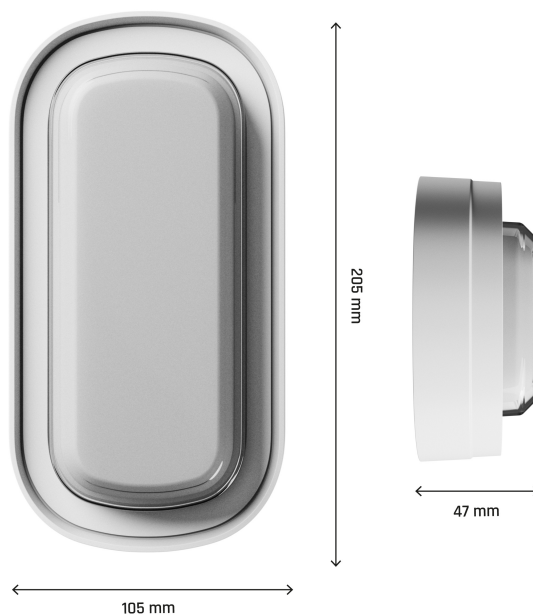

Related documents

[User manual](#)[Declaration of Conformity](#)

